

# DALI-RM/S 4x10 A

DALI actuator



# Product description

- $\underline{\ }$  Switching of 4 independent and potential free contacts via DALI
- \_ Max. switching current per contact: 10 A at ohmic load (cos  $\Phi$  = 1)
- \_1 DALI address per switching contact
- \_ For installation in switching cabinets
- \_ Status LED for indicating the operating status
- \_ Test switch for installation test \_ 5 years guarantee (conditions at
- https://www.tridonic.com/manufacturer-guarantee-conditions)

### Website


http://www.tridonic.com/22185237



# **TRIDONIC**

# DALI-RM/S 4x10 A

### DALI actuator

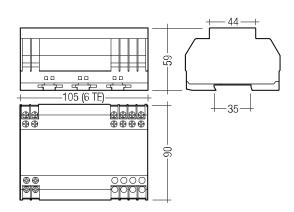

# Ordering data

Туре	Article number	Packaging, carton	Weight per pc.
DALI-RM/S 4x10A	22185237	1 pc(s).	0.46 kg

### Technical data

i ecnnicai data			
Rated supply voltage	230 – 240 V		
Mains frequency	50 / 60 Hz		
Power	< 2 W		
Typ. rated current (at 230 V, 50 Hz, all relay contacts open)	10.6 mA		
Typ. rated current (at 230 V, 50 Hz, all relay contacts closed)	20.1 mA		
Ambient temperature ta	0 +50 °C		
Max. casing temperature to	75 °C		
Storage temperature ts	-20 +70 °C		
Humidity ®	5 max. 85 %		
Type of protection	IP20		
Guarantee (conditions at www.tridonic.com)	5 Year(s)		

# Approval marks



### Specific technical data

Specific reciffical dat		Inputs		Output, relay		
Туре	DALI control input	Current draw	Number of DALI address es	Relay, floating	Switchin g output (at 125 V @	Switchin g output (at 240 V &C max.)
DALI-RM/S 4x10A	1	2 mA from DALI	4 (1 per contact)	4 (make contact)	30 W (ohmic load)	2,000 W / 10 A (ohmic load)

① Not condensed (max. 56 days/year at 85 %).

② More loads see data sheet.

#### 1. Standards

#### 1.1 DALI standard

DALI-RM/S 4x10A is designed to control control gear with DALI standard IEC 60929 (DALI VO).

#### 1.2 Glow-wire test

according to EN 60598-1 passed.

#### 2. Common

### 2.1 Functional and planning instructions

DALI-RM/S 4x10A enables switching of 4 independent switching loads via DALI. Lamps and other electronic users with a mains voltage of  $230/240\,\text{Vac}$  can be integrated in a DALI circuit.

- For each DALI scene the 4 contact positions "opened / closed" can be defined separately.
- Default parameters (not changeable):
  - Control value ≥ DALI DAP 2: contact closes
  - Control value ≤ DALI DAP 1: contact opens
  - Command "Recall min. Level" contact opens
  - Command "Recall max" contact closes (permits the identification with the "localisation" function on masterCONFIGURATOR)
- It is not permitted to connect tapped transformers (e.g. autotransformers) or 3-phase loads (e.g. 3-phase motors) to the DALI RM/S 4x10A because of the risk of a mains short circuit
- Use only in electrical installations that meet EMC regulations.
- No monitoring of loads

### 2.2 Status LED and momentary-action test switch

The status LED indicates the operating status of the device and helps to locate faults:

on, flickering occasionally	OK	
off, flickering at (4 second) intervals	fault in DALI line (break or short-circuit)	
off	no mains voltage	
flashing steadily (on/off every 0,5 s)	test mode	
red, intermittently flickering	error at output side (interruption or short circuit)	
red, flickering at regular intervals every 4s	error on DALI line (interruption or short circuit)	

### 2.3 Test mode

If the momentary-action test switch is pressed for 1 to 5 seconds, all luminaires connected will be switched on. Each time the test switch is subsequently pressed for 1 to 5 seconds, the luminaires are alternately switched on and off. In this way it is possible to check the wiring and operation of the DALI-RM/S 4x10A. The test mode is ended by pressing the momentary-action test switch for more than 5 seonds.


#### 2.4 Load specification (designed for 30,000 switching operations)

- Light bulb: 2,000 W
- High-voltage halogen lamps: 2,000 W
- Flourescent lamps uncompensated: 1,000 W
- Flourescent lamps parallel compensated:  $920 \, \text{W} \, / \, 100 \, \mu \text{F}$
- Flourescent lamps duo circuit: 2 x 1,000 W
- Compact flourescent lamps uncompensated: 800 W
- Compact flourescent lamps parallel compensated:  $800 \, \text{W} / 100 \, \mu\text{F}$
- Low-voltage halogen lamps to magnetic transformers: 400 VA
- Electronic ballasts: as mentioned in manufacturar data for electronic ballasts for automatic circuit breaker type B / 10 A
- HID lamps: 800 W / 100 μF

### 3. Installation


- Mounting of switching and distribution cabinets on cap rail (35 mm)
- The DALI interface is not SELV.
  - The installation instructions for mains voltage therefore apply.
- The maximum cable length of the DALI control signal (for a cable crosssection of 1.5 m<sup>2</sup>) must not be exceeded 300 m or 2 V voltage decrease

### 3.1 Wiring diagram

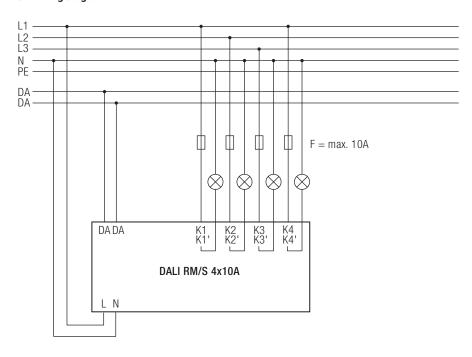

### 3.2 Wiring type and cross section

The wiring can be solid wire stranded wire with end sleeve with a cross-section of 0.75  $\,\mathrm{mm^2}$  to 2.5  $\,\mathrm{mm^2}$ .



### 4. Miscellaneous

### 4.1 Disposal



According to the WEEE directive return old equipment at appropriate collection facilities.

### 4.2 Additional information

Additional technical information at <u>www.tridonic.com</u>  $\rightarrow$  Technical Data

Guarantee conditions at  $\underline{\text{www.tridonic.com}} \rightarrow \text{Services}$ 

Lifetime declarations are informative and represent no warranty claim. No warranty if device was opened.