

## STANDARD Portable

BETEX 22 ELDi portable - heating cap. 20 kg




Portable heater for use in the workshop and on site.

- Min. ID Ø: 10 mm
- Max. OD Ø: 240 mm
- Max. width: 120 mm
- Automatic demagnetisation
- Automatic power reduction.
- Including 5 induction yokes
- Shoulder strap
  
- Max. bearing weight: 20 kg
- Max. weight other parts: 10 kg

*Technical details page 29*

### AREAS OF APPLICATION:

- Technical services
- MRO organisation

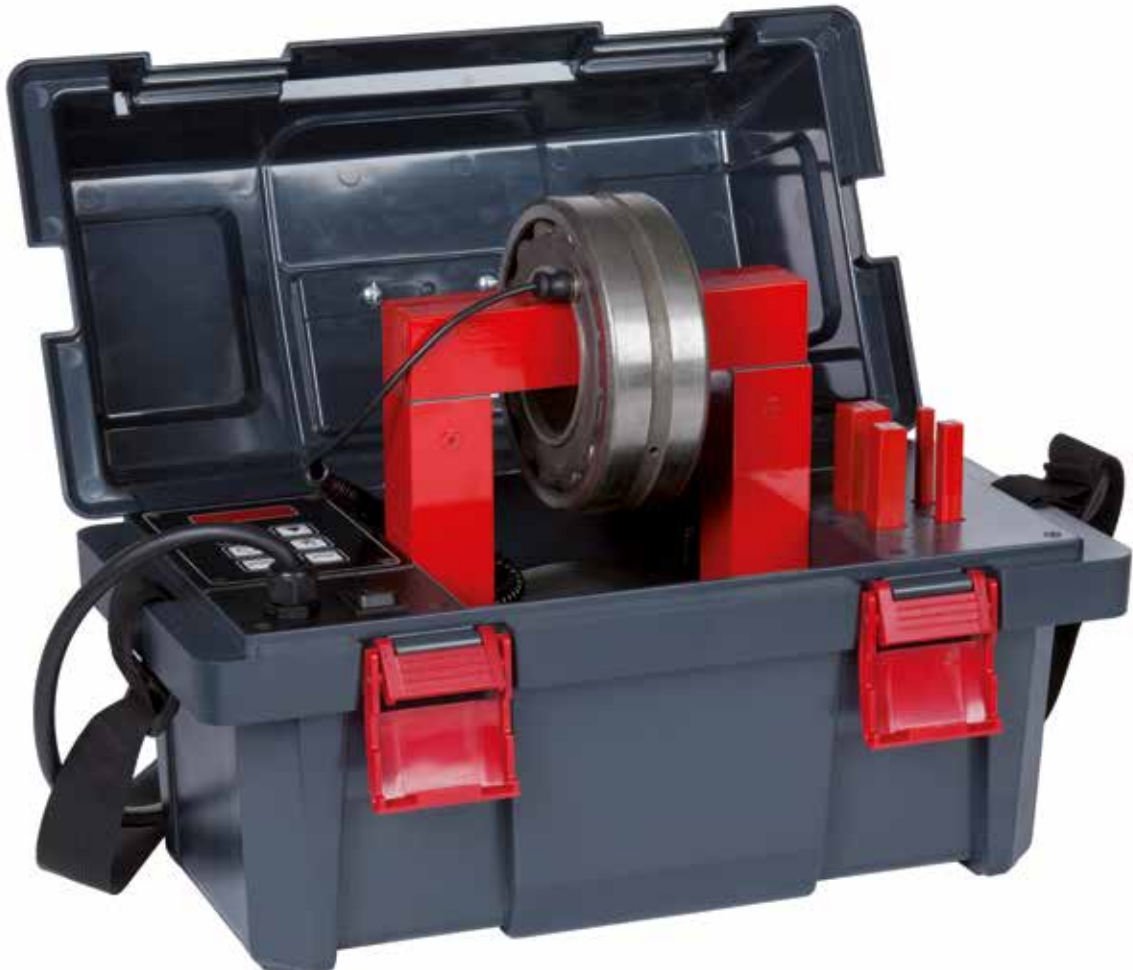

## TECHNICAL DETAILS - Portable



Type BETEX	24 XLDi Portable	22 ELDi Standard Portable	24 RLDi TURBO Portable	
Facility power: standard	1200W	3.6 kVA	3.6 kVA	
Voltage/Amp*: standard	230V/6A	230V/16A	230V/16A	
Voltage/Amp*: optional	-	120V/15A	120V/15A	
Frequency Hz	50/60Hz	50/60Hz	50/60Hz	
Yokes, standard mm / set 1	-	7,10,14,20,40	7,10,14,20,40	
Yokes, standard mm / set 2	-	in box	in heater	
Swivel arm	-	-	-	
Max. weight ± kg				
- bearings	10	20	50	
- other drive components	7	10	30	
Min. ID Ø: mm: vertical/horizontal	0	10	10/Ø100	
Max. OD Ø: mm	*A	180	240	380
Max. width, mm	*B	-	120	135
Max. width at horizontal heating, mm	*B	50	-	135
Cross section poles mm	*D	-	40	Ø100
Pole height mm	-	130	165	
Temperature control in °C or °F				
- max reach*	150°C	150°C	240°C	
- magnetic probe	yes	yes	yes	
- digital display	yes	yes	yes	
Time control				
- max reach	0-45 min.	0-30 min.	0-45 min.	
- digital display	yes	yes	yes	
Sound signal	yes	yes	yes	
Error code	yes	yes	yes	
Temperature hold	yes	yes	yes	
Automatic power reduction	-	-	yes	
Automatic demagnetization, <2A/cm	yes	yes	yes	
Thermal protection	yes	yes	yes	
Support for horizontal heating	-	-	yes	
Dimensions mm (lwxhxh)	460x240x280	460x240x280	600x220x275	
Weight heater kg	7	21	23	
excl. Yokes		(incl. yokes)	(incl. yokes)	
Electric crane for yokes	-	-	-	
Alarm signal	-	-	-	
Mobile	-	-	-	

Heating times are subject to the relationship between:

- Minimum bore and maximum outside diameter, width, weight
- Required temperature and material type
- Available power

**TURBO design: high output, very energy efficient!**

