

500<sup>+30</sup><sub>0</sub>

Measured from support  
Merjeno od nosilca

85<sup>+5</sup><sub>0</sub>

12-14

90 $\pm$ 2



42 $\pm$ 1

$\varnothing$  24 $\pm$ 0,2  
 $\varnothing$  277 $\pm$ 1  
300 $\pm$ 1

97 $\pm$ 2

BLOWING  
AIRFLOW DIRECTION  
SMER ZRAKA

Kondenzator se dobavlja  
ločeno, en kos v škatli  
Capacitor delivered separately  
1 pcs in the box

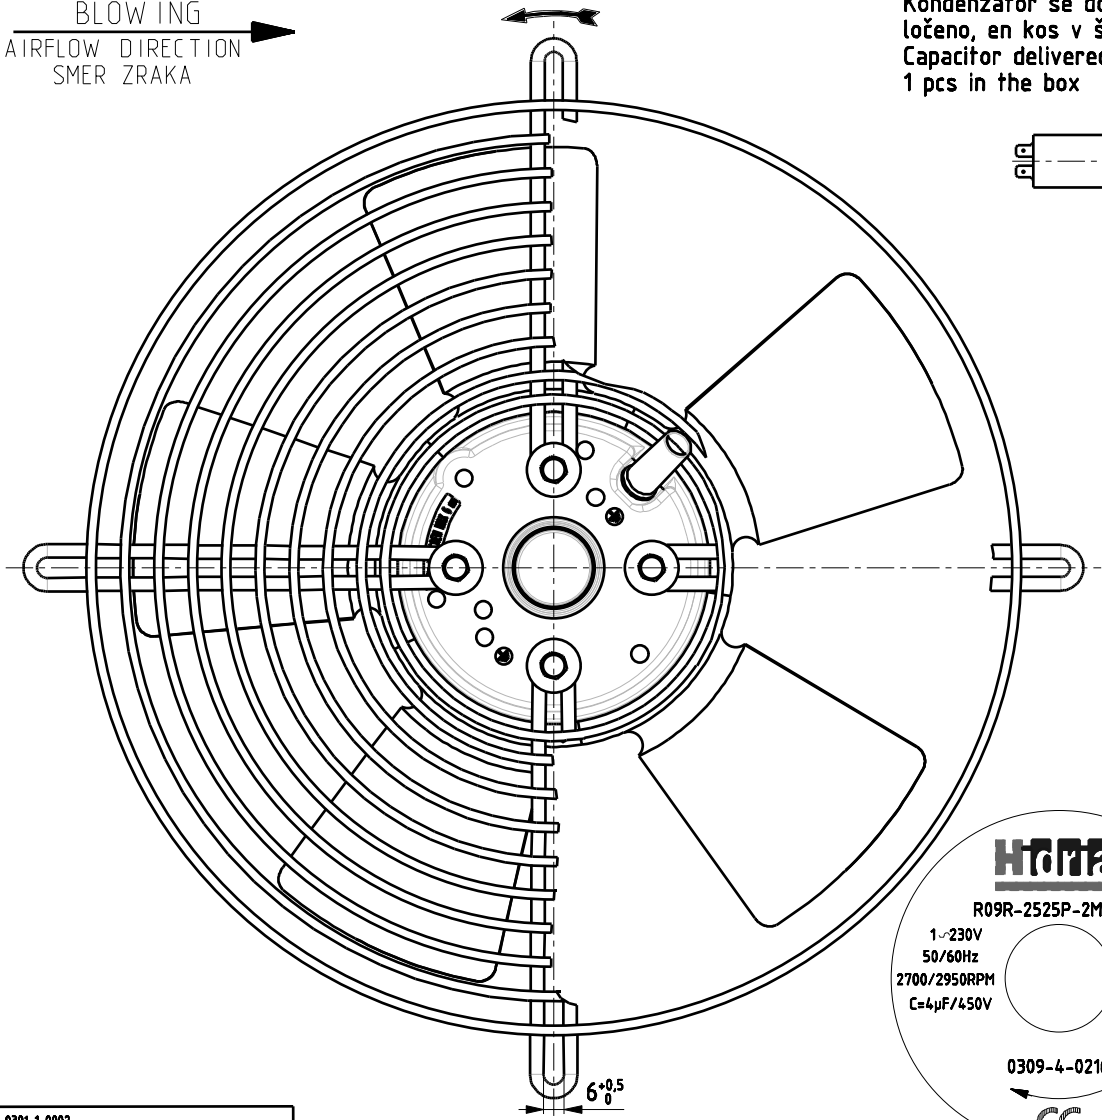

**HOTOF**

R09R-2525P-2M-3510


1~230V  
50/60Hz  
2700/2950RPM  
C=4µF/450V

0,44/0,61A  
95/135W  
TH.PROT.  
INS.CL.F IP44  
DATE

0309-4-0216

CE

Connecting diagram 0301-1-0002



| Rotation            | L          | N         | PE              | Join together   | Protection device    | Winding connection                    |
|---------------------|------------|-----------|-----------------|-----------------|----------------------|---------------------------------------|
| CCW from cable side | U2 (black) | U1 (blue) | PE (grey/green) | [CA1U2] [CA2Z2] | Internally connected | Permanent split phase capacitor motor |

**HOTOF**

Hidria Rotomatika

NETOLERRANCE HERE  
INTOLERANČNE DIM.

ISO 2768-M

VERSIJA/FORMAT

67:100 / A3

MATERIAL

NAZIV/TITLE:

VENTILATOR  
R09R-2525P-2M-3510

KOD/

0309-4-0216

0309-L-0216

VERZIJA/

REV:

LIST/

SHEET:

1

Navodilo za kontrolo ventilatorja 0301-1-4423

Checking instructions 0301-1-4423

V vsako škatlo priložiti priključno shemo 0301-1-0002

In each box must be enclosed connection diagram 0301-1-0002