
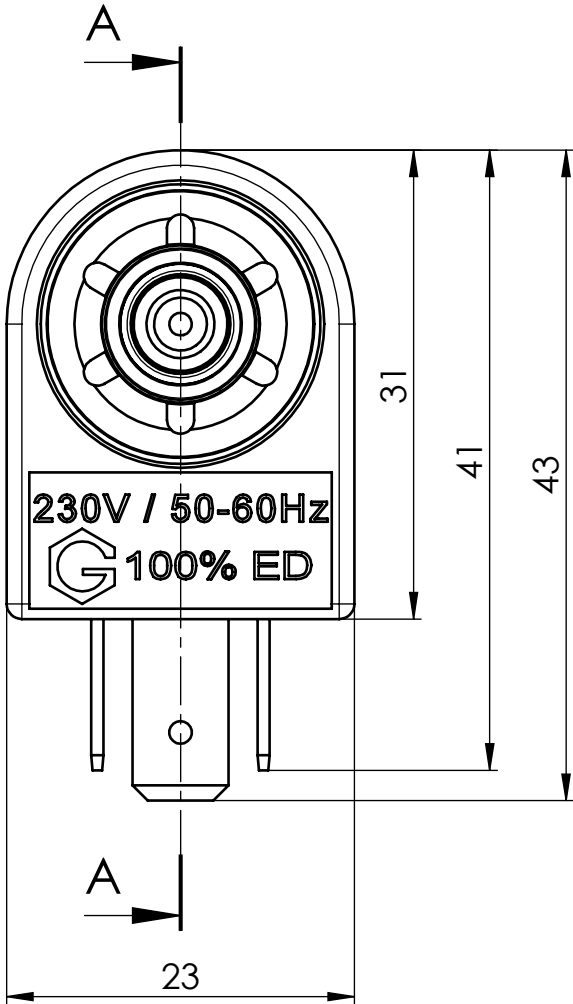


No. ARTICLE	DESCRIPTION	MATERIAL	QTY
1	STOP RING	Stainless steel (AISI 303)	1
2	VALVE	PTFE	3
3	SUCTION FITTING	Stainless steel (AISI 431)	1
4	VALVE SPRING	Stainless steel (AISI 316)	3
5	WORKING SPRING	Stainless steel (AISI 316)	1
6	SPACER	Stainless steel (AISI 303)	1
7	PISTON	Stainless steel (AISI 431)	1
8	PRESSURE SPRING	Stainless steel (AISI 316)	1
9	PRESSURE FITTING	Stainless steel (AISI 431)	1
10	STOP RING	Stainless steel (AISI 303)	1

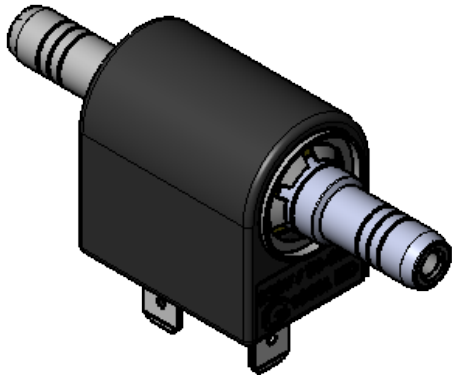

Main characteristics

Type of pump : EMX 08-T/C-230/50-3V-DIN &229

Back pressure max : 0.8 bar

Flow rate : 9 l/h (230V~ / 50Hz)

Suction height min : 3 m

Voltage : 230 V (square signal / 50Hz)

Input power : 18 W



Duty cycle : 100% ED

Weight : 0.1 kg

Liquid temperature : 1 to 50°C

Ambient temperature : 1 to 60°C

Insulation class : F (155°C)

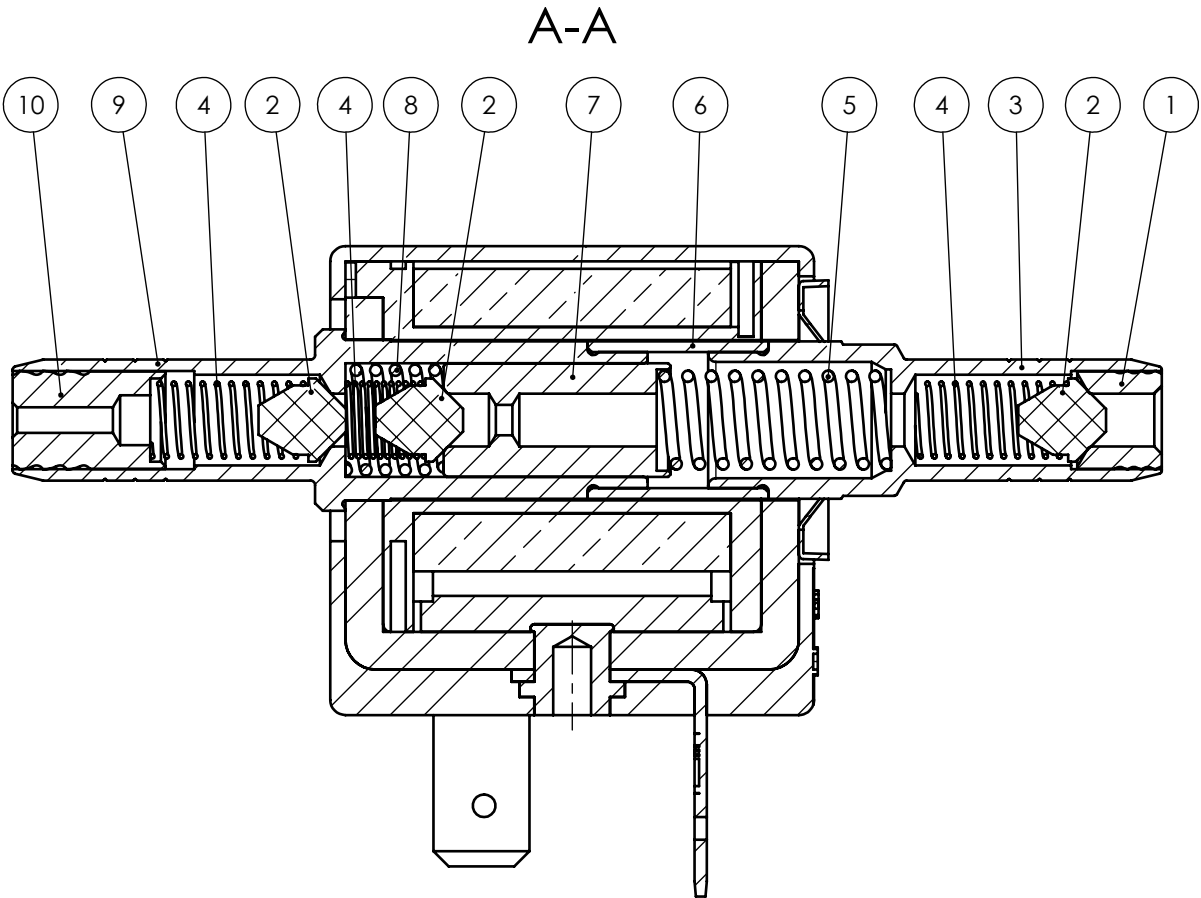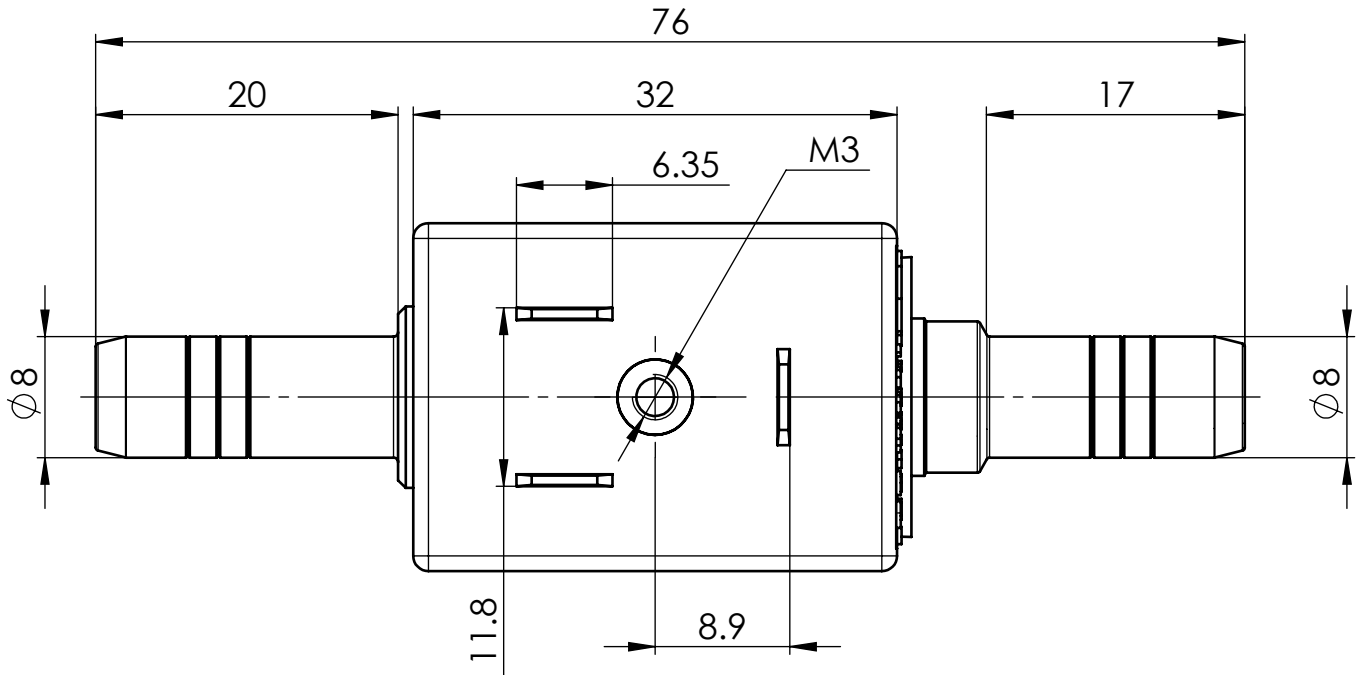

c1	1731-13	28.01.13	J.S.								
b1	988-06	03.02.06	J.S.						Dessiné	07.01.10	Y.B.
a1	884-04	29.03.04	J.S.	d1	1862-13	16.12.13	BRU		Contrôlé	09.02.16	BRU
N°	Modification	Date	Nom	N°	Modification	Date	Nom			Date	Nom
Nous nous réservons tous les droits prévus par la loi concernant la protection de ce dessin.	Poids [g] : 100.88				Encombrement : 76 x 43 x 23		Matière :				
	Volume [mm³] :										
	Emploi : EMX 08				Description : EMX 08-T/C-230/50-3V-DIN &229						
Tolérances générales selon ISO 2768-f	Rue des Casernes 59 CH - 1950 SION Tél. : +41 (0)27 205 72 05 Fax : +41 (0)27 205 72 06 www.gotec.ch / info@gotec.ch				Echelle : 2:1		N° de dessin : 106884				d