



Traction cable

RADOX EN 50264-3-1 600V M

Product description:

RADOX EN 50264-3-1 600V M	Single core cables with reduced wall insulation dimensions
Nominal voltage:	600 / 1000 V AC
Hazard level:	M (extra low temperature, extra oil and extra fuel resistant)


General features:

Halogen free electron-beam cross-linked cores with improved behaviour in case of fire, easy to strip, soldering iron resistant and flexible. Meet the requirements of EN 50264-3-1 standard.

Application:

The cables are intended for permanent installation in rail vehicles or for applications in which a limited alternating bending stress occur during service. Guidelines for selection and installation are described in the standards EN 50355 and EN 50343. The cores are used as sub-components in cables according to EN 50264-3-2.

General composition of cable:

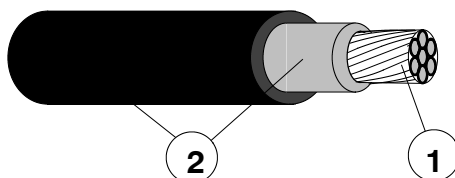

- | | |
|-----------------|--|
| 1. Conductor : | stranded tin plated copper, acc. to EN 60228 cl. 5 |
| 2. Insulation : | |
| inner layer | RADOX EI 110, colour: white |
| outer layer | RADOX EI 109, colour: black or greenyellow |

Marking:

[a] HUBER+SUHNER RADOX EN 50264-3-1 600V [b] M [c]-[d] [e] [f]

		example:
[a]	Meter marking (in m)	= 123456 = m
[b]	Cross section (in mm ²)	1X150
[c]	Part number	12345678
[d]	Batch number	1234567
[e]	Production week and year	03-2017
[f]	Production place (only if China)	CN

Copyright 2018 HUBER+SUHNER AG. This document may not be amended and its content is confidential. It may not be passed on to third party which are not bound by confidentiality.

The product fulfils the test and specification requirements described in this document for the stated areas of application and operating conditions. HUBER+SUHNER AG does not expressly or implicitly guarantee performance under additional or changed conditions. Deviations are to be agreed upon in writing.

HUBER+SUHNER
Low Frequency Division
CH-8330 Pfäffikon



+41 (0)44 952 22 11



+41 (0)44 952 26 40

www.hubersuhner.com



Traction cable

RADOX EN 50264-3-1 600V M

Technical Data :

Voltage rating cond.-earth	U ₀	600	V AC
Voltage rating cond.-cond.	U	1000	V AC
maximum permissible Voltage rating AC cond.-earth		720	V AC
maximum permissible Voltage rating AC cond.-cond.	U _m	1200	V AC
maximum permissible Voltage rating DC cond.-earth	V ₀	900	V DC
maximum permissible Voltage rating DC cond.-cond.		1500	V DC
Test Voltage.		3500	V AC
Temperature range		- 50 ... + 120	°C
Min. bending radius			
fixed installation	cable diameter ≤ 12 mm	3 x D	
	cable diameter > 12 mm	4 x D	
sporadic movement	cable diameter ≤ 12 mm	4 x D	
	cable diameter > 12 mm	5 x D	

NB:

The upper temperature limit is determined by long term ageing according to EN 50305 Par. 7 and extrapolation to 20,000 hours.

The lower temperature limit is determined by bending and elongation tests according to EN 60811-1-4 Par. 8, respectively low temperature behaviour tests for according to GOST 20.57.406-81, method 204-1 and GOST 17491-80.

The specified bending radii require a careful and proper handling using proven fastening technologies.

The cables are in conformity with:

Fire protection on railway vehicles, hazard level	HL1 - HL3	EN 45545
Vertical flame spread	50 < L ≤ 540 mm	EN 60332-1-2
Vertical flame spread, bunched, D ≤ 6 mm	L ≤ 1.5 m	EN 50305, 9.1.2
Vertical flame spread, bunched, 6 < D < 12 mm	L ≤ 2.5 m	EN 50305, 9.1.1 (EN 60332-3-25)
Vertical flame spread, bunched, D ≥ 12 mm	L ≤ 2.5 m	EN 60332-3-24
Smoke density	T ≥ 70 %	EN 61034-2
Toxicity	ITC ≤ 6	EN 50305, 9.2
Fire protection on railway vehicles, level of protection	1 - 4	DIN 5510
Vertical flame spread	50 < L ≤ 540 mm	EN 60332-1-2
Vertical flame spread, bunched, D ≤ 6 mm	L ≤ 1.5 m	EN 50305, 9.1.2
Vertical flame spread, bunched, 6 < D < 12 mm	L ≤ 2.5 m	EN 50266-2-5 (EN 50305, 9.1.1)
Vertical flame spread, bunched, D ≥ 12 mm	L ≤ 2.5 m	EN 50266-2-4
Smoke density	T ≥ 60 %	EN 61034-2
Corrosivity of combustion gases	pH ≥ 4.3, C ≤ 10 μS/mm	EN 50267-2-2
Amount of halogen acid gas	HCl + HBr ≤ 0.5 %	EN 50267-2-1
Content of fluorine	HF ≤ 0.1 %	EN 60684-2, 45.2
Toxicity, insulation	ITC ≤ 3	EN 50305, 9.2
Fire protection on railway vehicles, category	A1	NF F16-101
Fire protection on railway vehicles, class	C / F1	NF F16-101
Vertical flame spread	50 < L ≤ 540 mm	NF C32-070, 2.1
Vertical flame spread, bunched	L ≤ 300 mm	NF C32-070, 2.2
Smoke index	I.F. ≤ 5	X10-702-2, NF X70-100-1
Requirement of hazard level code M	(according to EN 50264-1 or EN 50306-1)	
Extra low temperature	- 40°C	
Extra oil resistance	IRM 902, 72h, 100°C	
Extra fuel resistance	IRM 903, 168h, 70°C	

Applicable documents:

- 586 554 Current rating for single core cables



Traction cable

RADOX EN 50264-3-1 600V M

Core size mm ²	Conductor Construction n x mm	Conductor Dia. mm	Core dia. mm	R ₂₀ ¹⁾ max. Ω / km	Fireload nom. kJ / m	Combustible material nom. Kg/100m	Weight nom. Cable kg / 100m	Colour	H+S Part No.
1 x 1	32 x 0.19	1.26	2.5±0.1	20.0	88	0.6	1.5	BK GNYE	85 096 345 85 096 351
1 x 1.5	27 x 0.25	1.49	3.0±0.2	13.7	126	0.8	2.2	BK GNYE	85 096 346 85 096 352
1 x 2.5	45 x 0.25	1.92	3.4±0.2	8.21	153	1.0	3.1	BK GNYE	85 096 347 85 096 353
1 x 4	52 x 0.29	2.44	4.0±0.2	5.09	188	1.3	4.7	BK GNYE	85 096 348 85 096 354
1 x 6	78 x 0.30	2.98	4.6±0.2	3.39	256	1.6	6.7	BK GNYE	85 096 349 85 096 355
1 x 10	74 x 0.4	4.0	5.5±0.2	1.95	318	2.0	11	BK GNYE	85 096 350 85 096 356
1 x 16	119 x 0.4	5.3	6.75±0.15	1.24	425	2.6	16	BK GNYE	85 097 024 85 097 025
1 x 25	182 x 0.4	6.6	8.45±0.15	0.795	676	4.1	25	BK GNYE	85 097 026 85 097 027
1 x 35	266 x 0.4	7.8	9.7±0.2	0.565	834	5.1	35	BK GNYE	85 097 028 85 097 029
1 x 50	378 x 0.4	9.3	11.4±0.2	0.393	1107	6.7	50	BK GNYE	85 097 030 85 097 031
1 x 70	348 x 0.5	11.4	13.80±0.25	0.277	1485	8.9	68	BK GNYE	85 097 032 85 097 033
1 x 95	456 x 0.5	12.9	15.30±0.25	0.210	1676	10	87	BK GNYE	85 097 034 85 097 036
1 x 120	570 x 0.5	14.5	17.2±0.3	0.164	2028	12	110	BK GNYE	85 097 037 85 097 038
1 x 150	722 x 0.5	16.0	19.2±0.3	0.132	2633	16	138	BK GNYE	85 097 039 85 097 040
1 x 185	874 x 0.5	17.8	21.4±0.3	0.108	3330	20	170	BK GNYE	85 097 048 85 097 049
1 x 240	1147 x 0.5	20.8	24.6±0.3	0.0817	3968	23	219	BK GNYE	85 097 050 85 097 051
1 x 300	1443 x 0.5	23.0	27.2±0.4	0.0654	4686	27	272	BK GNYE	85 097 052 85 097 053
1 x 400	1952 x 0.5	26.5	31.0±0.4	0.0495	5800	34	364	BK GNYE	85 097 718 85 097 719

¹⁾ R₂₀: Conductor resistance according to EN 60228