


We reserve all rights to this drawing, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this drawing is not permitted without the written consent of STABILUS.

- The gas spring must not be mechanically modified or damaged.
- The warning label must not be removed or obscured.
- compression and extension forces measured acc. to STAB-Spec. 10009033
- Spring test with piston rod downwards
- Protect piston rod from dirt, paint and damage
- Disposal acc. to STAB-Spec.10009375
- Drawing not true-to-scale
- release-force of valve acc. to STAB-Spec. 10005233
- Observe installation instructions according to STAB-Spec. 10005593
- Installation: position any as required
- Permissible operating temperature range -30°C to +80°C
- To release:
press dia. pin by min. 2.5 mm
- Locking:
release the pin completely

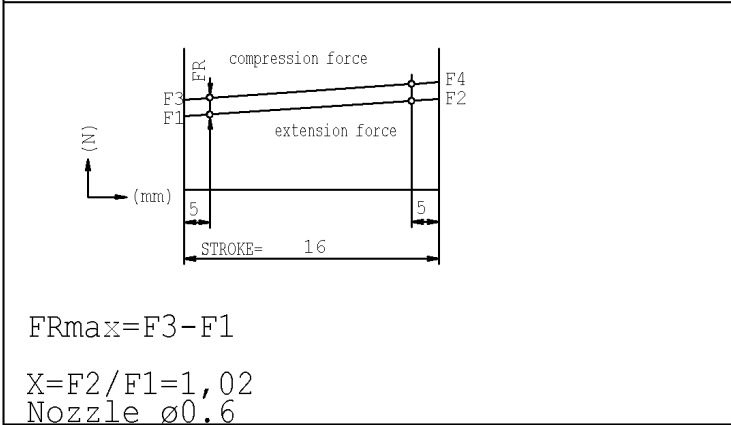

CHANGE	NEW	SERIE
	OLD	VERSUCH
	CHG.NO.	574070
	NAME	10.7.09 SCHÄFER
	NO.	1

Forces (statically measured)		
F1 (N)	F4 max (N)	FR max (N)
extension force	compression force	friction
900±68	1070	80

DIMENSIONS WITH- OUT TOLERANCE		BLOC-O-LIFT
+/-1		06 11 0824 20 016

Unregistered Copy
Print-out is not subject to the modification service

STABILUS

Modifications in favour of technical process reserved

DRAWING		CHECKED	
DATE	01.07.2009	NAME	D.NITA
Document No.		10164943	
030814		E	